

CARACTÉRISTIQUES ET AVANTAGES

CONSTRUCTION


Les tuyaux, robinets et vannes en acier inoxydable sont résistants à la corrosion et offrent une longue durée de vie.

INSTALLATION

L'installation est rapide et facile grâce à la tuyauterie et aux vannes prémontées.

PROTECTION

L'amortisseur de coups de bélier joue un rôle essentiel dans la protection du chauffe-eau instantané et de l'appareil. système de tuyauterie en absorbant les coups de bélier.

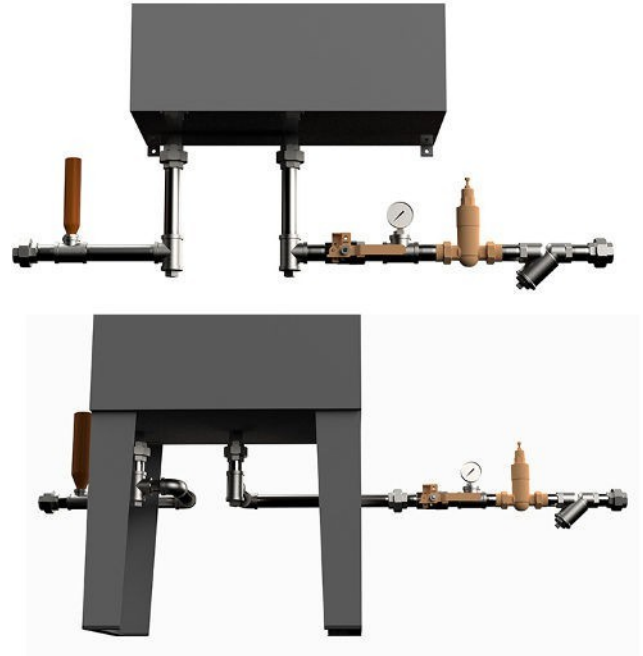

SPÉCIFICATIONS

Le site Haws 932X Amortisseurs de coups de bélier et les kits de tuyauterie sont spécialement conçus pour les chauffe-eau instantanés Haws 9321CE, 9326CE et 9327 CE. Ce kit complet comprend des composants de haute qualité, tels que des tuyaux en acier inoxydable, une vanne d'alimentation de 1-1/4" en acier inoxydable 316 et un tamis en Y. Il comprend également une vanne de régulation de pression de 1-1/4 pouce en bronze sans plomb et une protection contre les coups de bélier en laiton sans plomb.

APPLICATIONS

La série 932X propose 10 kits différents, conçus pour répondre à différentes exigences, selon la taille du purgeur nécessaire et si le chauffe-eau instantané est commandé avec ou sans pieds de support.

WaterHammer Arrestor Sizing Chart


Pipe Length (header to shower)	Arrestor Size	932X Unit with Legs Kit #	932X Unit without Legs Kit #
15'	B	932X-12	932X-11
15' – 30'	C	932X-22	932X-21
30' – 50'	D	932X-32	932X-31
50' – 70'	E	932X-42	932X-41
75' – 90'	F	932X-52	932X-51

NOTES:

1. DIMENSIONS IN INCHES.
2. ALL TOLERANCES: $\pm 1"$
3. MATERIAL:
 PIPE: 304 SST
 FITTINGS: 304 SST
 BALL VALVE: 316 SST
 PRESSURE REGULATING VALVE: LEAD FREE BRONZE
 LEAD FREE BRASS WATER HAMMER ARRESTOR
 Y-STRAINER: 316 SST
5. ESTIMATED WEIGHT:
 WET: 30 LBS

REVISIONS				
REV	DESCRIPTION	ECN	DATE	BY
1	INITIAL RELEASE	5456	10/17/2019	JJ

PIPING KIT CONFIGURATOR		
MODELS	WATER HAMMER ARRESTOR SIZE	LEGS
932X-11	B (15' pipe length from header to shower)	No
932X-21	C (15'-30' pipe length from header to shower)	No
932X-31	D (30'-50' pipe length from header to shower)	No
932X-41	E (50'-75' pipe length from header to shower)	No
932X-51	F (75'-90' pipe length from header to shower)	No

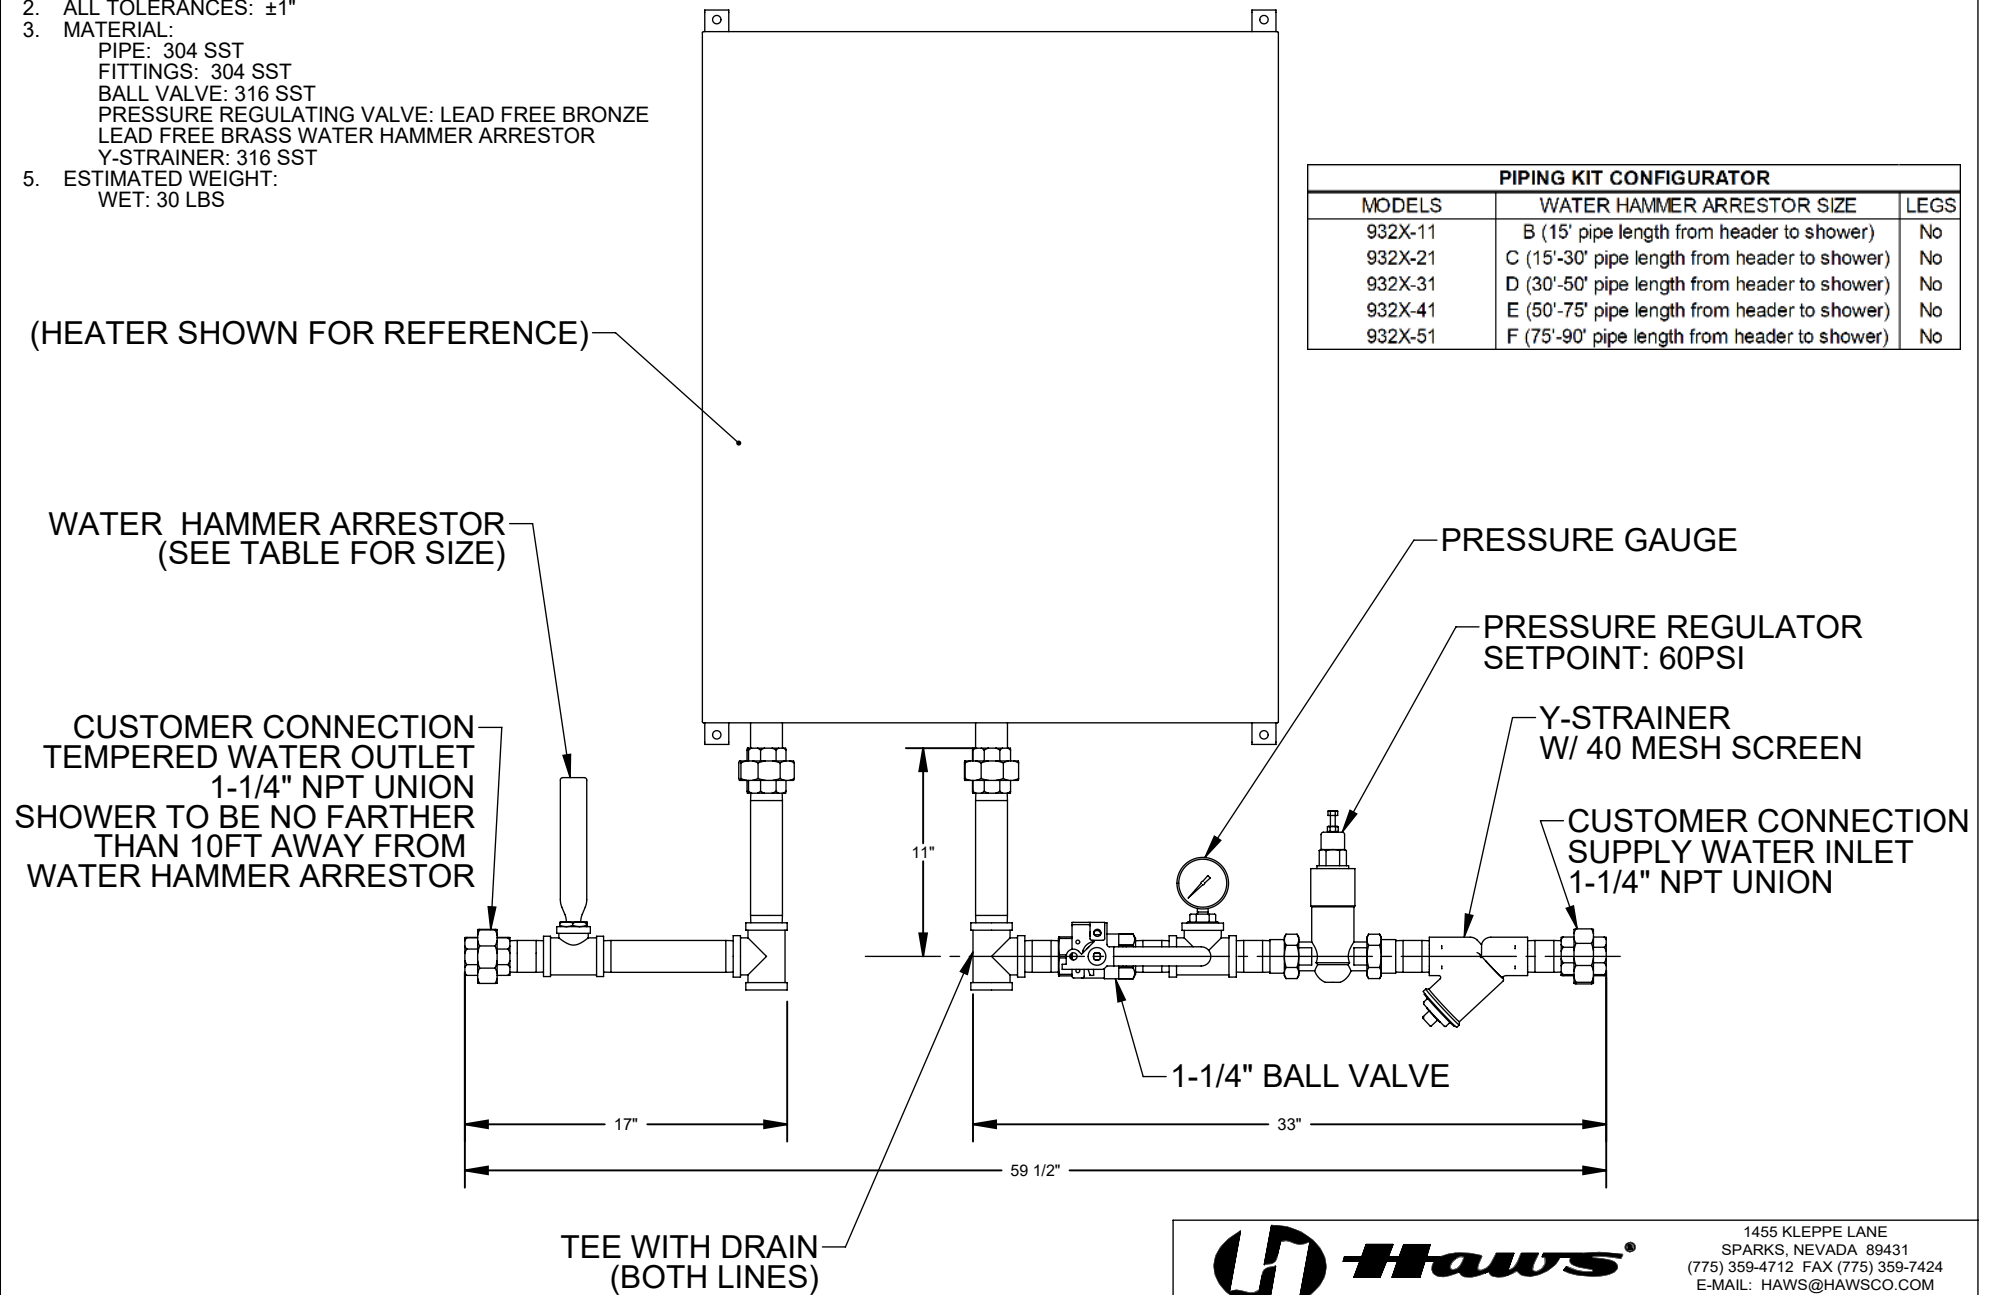




1455 KLEPPE LANE
 SPARKS, NEVADA 89431
 (775) 359-4712 FAX (775) 359-7424
 E-MAIL: HAWS@HAWS.CO.COM
 WEBSITE: WWW.HAWS.CO.COM

ECN: 5456	REV. ECN: 5456	BY: JL	MODEL(S)	PART NUMBER
DRAWN: JL	DATE: 10/08/19	CHKD: DW	932X - HEATER PIPING KIT	0510000981.D
APPROVED: NE	DATE: 11/07/19			REVISION
			SCALE: 1:10	1
			DRAWING TYPE: INSTALLATION	SHEET 1 OF 2

NOTES:

1. DIMENSIONS IN INCHES.
2. ALL TOLERANCES: $\pm 1"$
3. MATERIAL:
 PIPE: 304 SST
 FITTINGS: 304 SST
 BALL VALVE: 316 SST
 PRESSURE REGULATING VALVE: LEAD FREE BRONZE
 LEAD FREE BRASS WATER HAMMER ARRESTOR
 Y-STRAINER: 316 SST
5. ESTIMATED WEIGHT:
 WET: 40 LBS

PIPING KIT CONFIGURATOR		
MODELS	WATER HAMMER ARRESTOR SIZE	LEGS
932X-12	B (15' pipe length from header to shower)	Yes
932X-22	C (15'-30' pipe length from header to shower)	Yes
932X-32	D (30'-50' pipe length from header to shower)	Yes
932X-42	E (50'-75' pipe length from header to shower)	Yes
932X-52	F (75'-90' pipe length from header to shower)	Yes

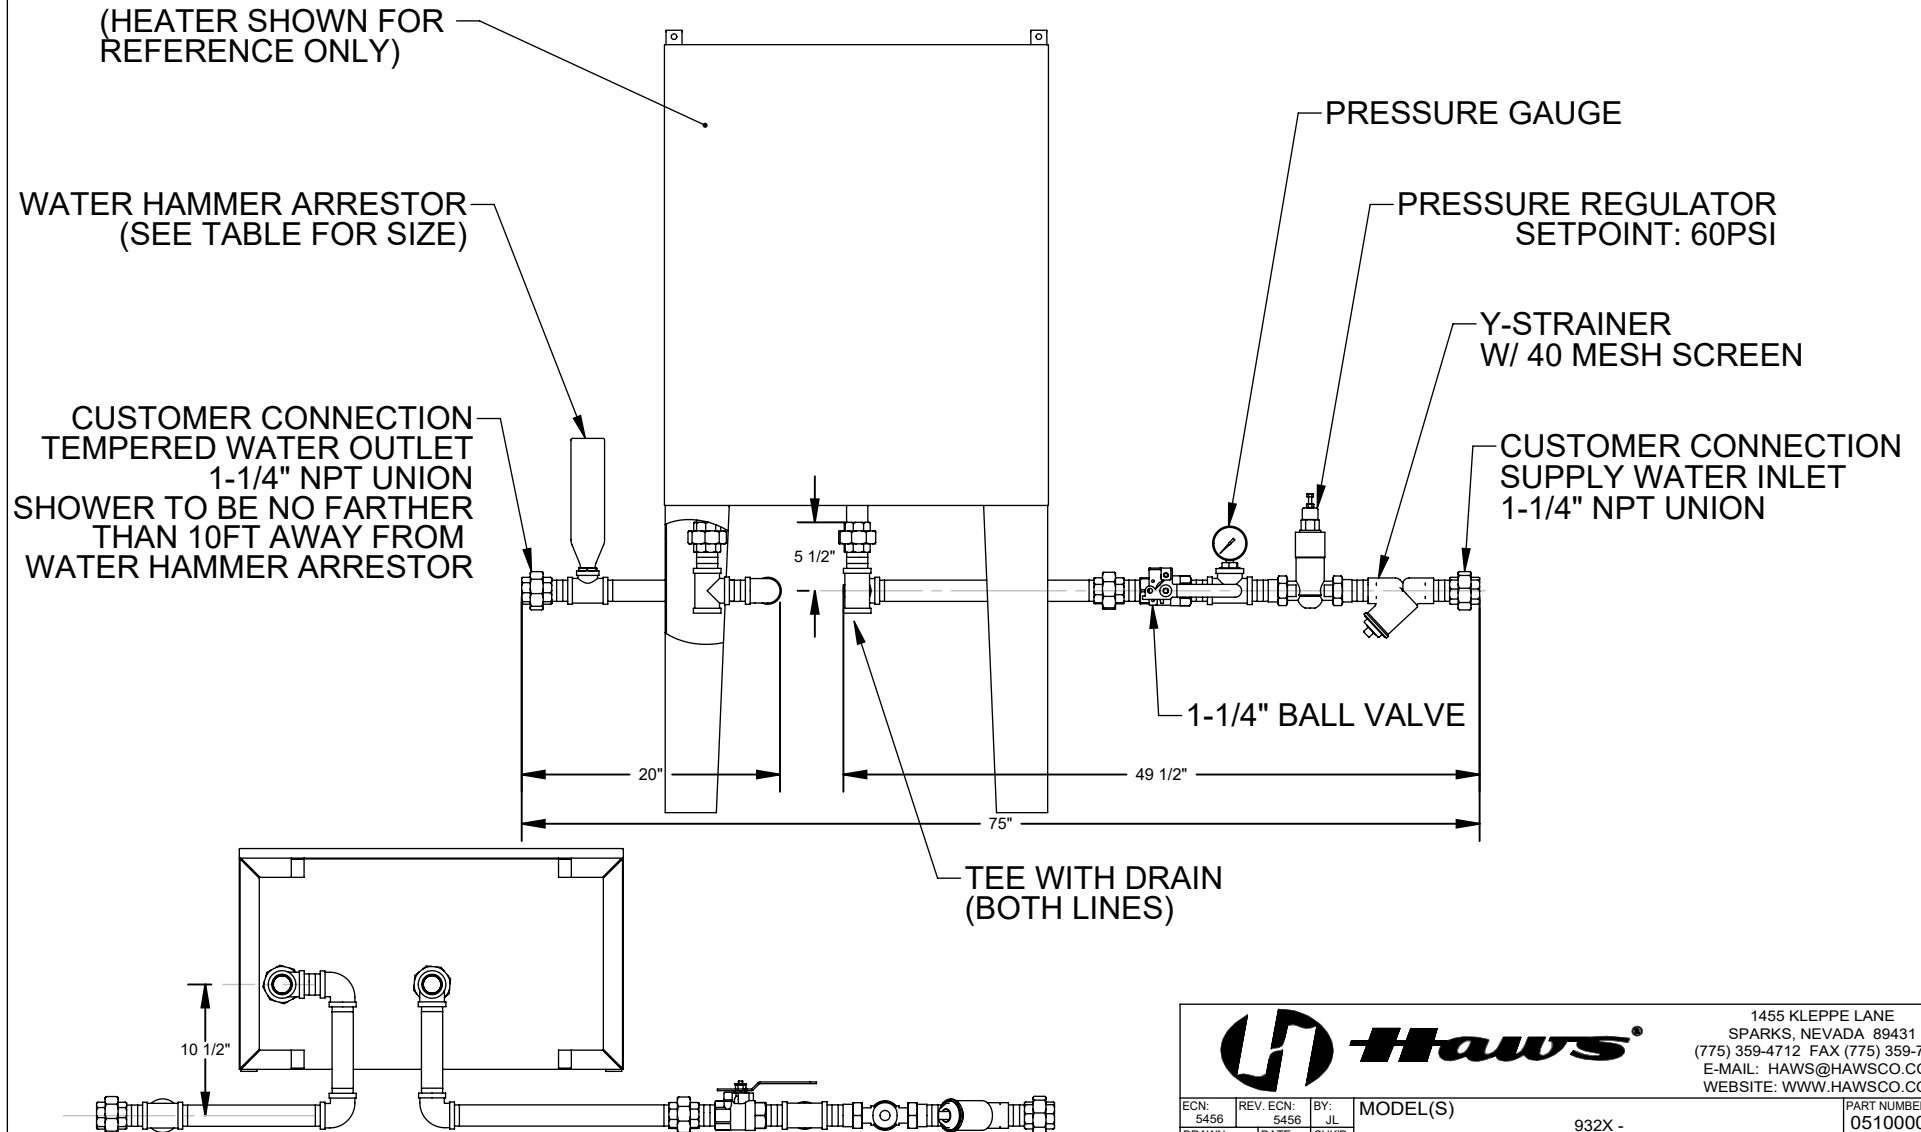

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
		PART NUMBER 051000981.D REVISION 1	
ECN: 5456 DRAWN: JL APPROVED: NE	REV. ECN: 5456 DATE: 10/08/19 DATE: 11/07/19	BY: JL CHKD: DW SCALE: 1:15	MODEL(S) 932X - HEATER PIPING KIT DRAWING TYPE: INSTALLATION
SIZE: A		SHEET 2 OF 2	